

Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

EDD-DC series

Models **EDD60-12DC** **EDD60-24DC** **EDD60-48DC**



Class 2

Class P

SELV

RoHS



The driver is inside

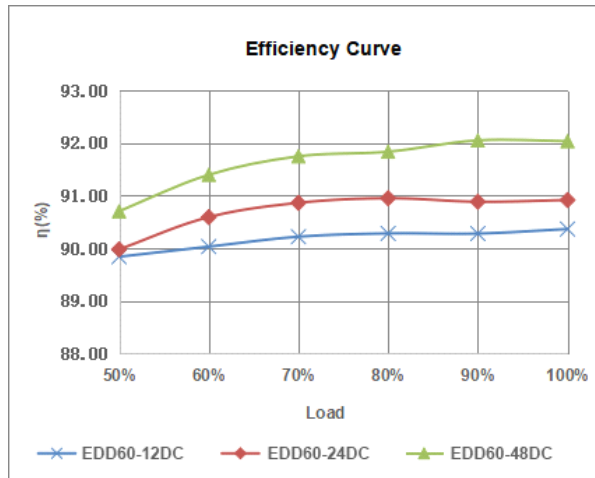
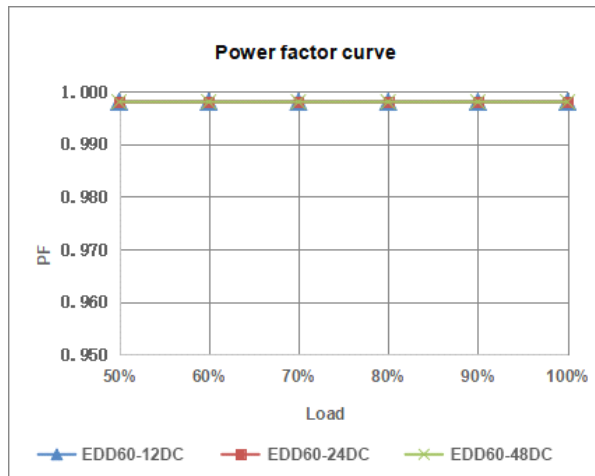
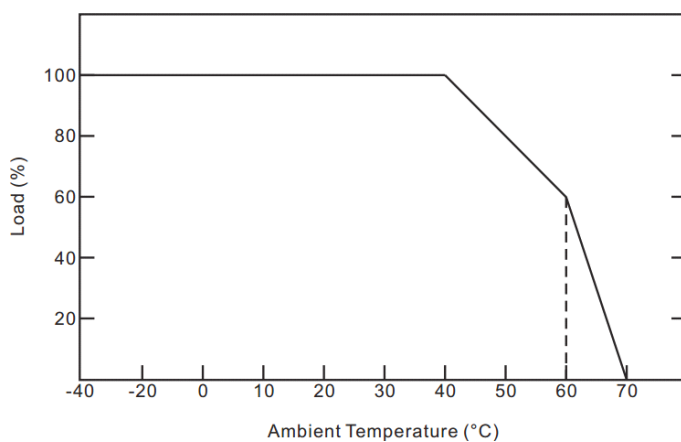
Features

Output:	Constant Voltage
Input Range:	120VAC
PFC design:	Built-in active PFC function
Protections:	Short circuit/ Over load/ Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	For dry and damp locations (US)
Design features:	1) Fine-tune output voltage can be adjusted slightly 2) Preset dimmer with on/off switch 3) 3-Way switches 4) Eliminated compatibility issues between drivers and switches
Dimming range:	0.3%-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	16KHZ PWM output with dimming curve is a gamma 2.2 curve Flicker-free

Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

Specification

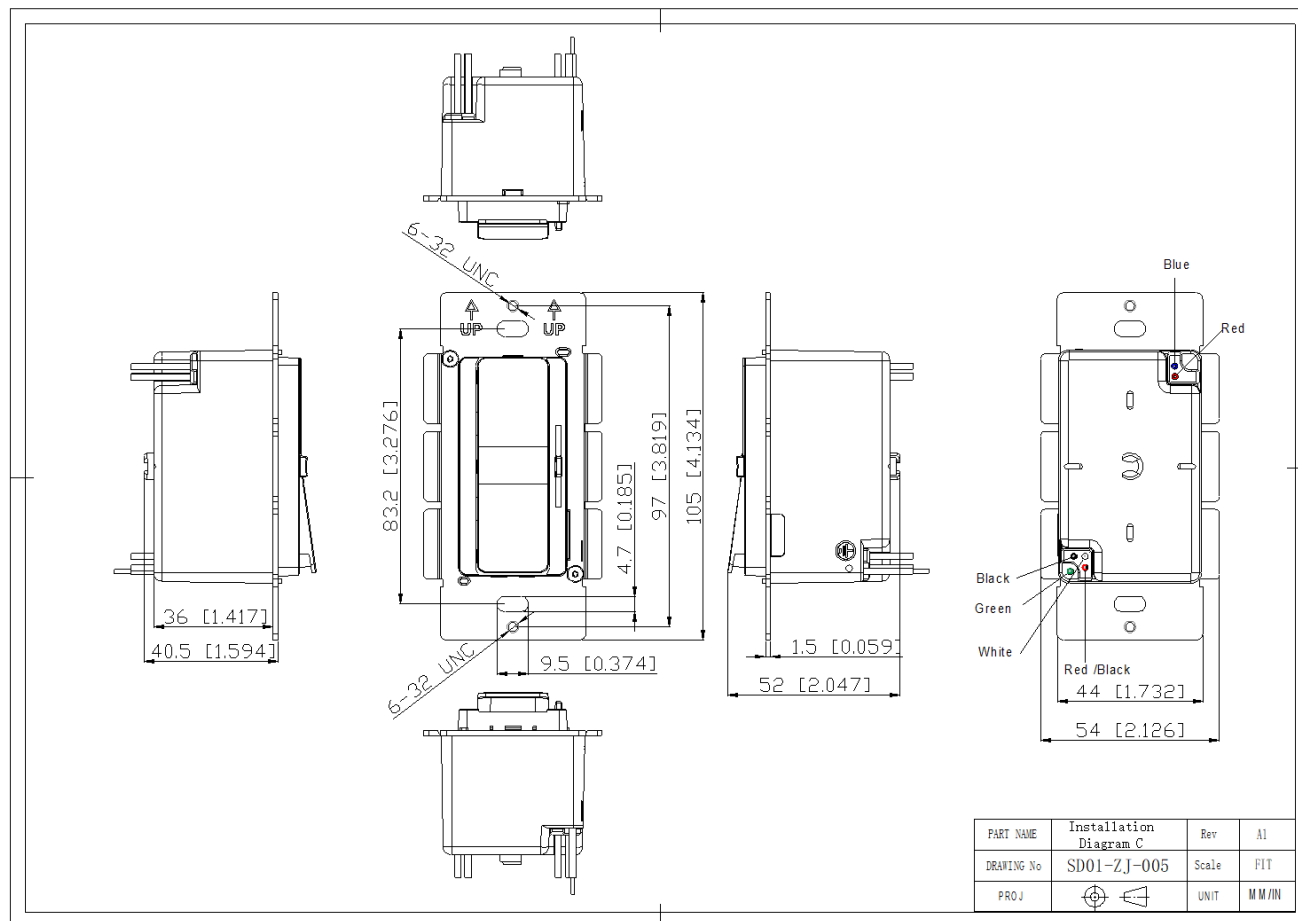
Model		EDD60-12DC		EDD60-24DC		EDD60-48DC	
Certificate		UL / cUL / FCC /class 2 / Class P / SELV / RoHS / Reach					
Output	DC Rate Voltage	12V (12V-13.5V adjust by knob)		24V (24V-26V adjust by knob)		48V (48V-50V adjust by knob)	
	Voltage Tolerance	±0.5V					
	Load Regulation	≤2%		≤1%		≤1%	
	Line Regulation	≤0.5%					
	Rated current	5A		2.5A		1.25A	
	Rated power	60W		60W		60W	
Input	Voltage Range	120VAC					
	Frequency Range	60Hz					
	Power Factor @ full load	0.99					
	THD(Typ.) @ full load	≤10%					
	Efficiency @ full load	90.0%		91.0%		92.0%	
	AC Current (Max.)	0.6A		0.6A		0.6A	
	Inrush Current (Typ.)	50A, 150us@50% Ipeak					
	Leakage current	<0.5mA					
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed					
	Over Load	≥110% Constant current mode, recovers automatically after fault condition is removed					
	Over temperature	Shell surface temperature 100℃±10℃ shut down o/p voltage, automatically recover after cooling					
Environment	Working TEMP.	-40~+60℃ (see below derating curve)					
	Working Humidity	20 - 95%RH non-condensing					
	Storage TEM.,Humidity	-40 - +80℃,10 - 95% RH non-condensing					
	TEMP.coefficient	±0.03%/℃(0 - 50℃)					
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes					
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)					
	Withstand voltage	I/P-O/P:1.8KVAC I/P-F/G:1.8KVAC O/P-F/G:0.5KVAC (US)					
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25℃ / 70% RH					
	EMC Immunity	FCC/ICES do not request this test (US)					
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)					
Others	Net Weight	0.25KG					
	Dimension	105*54*51mm / 4.134"x2.126"x1.996" (Inch)					
	Packing						
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25℃of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .						

Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output
Efficiency Curve (efficiency vs output load)

Power factor curve

Derating Curve (Output power VS Ambient TEMP)


1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature.
Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life .

Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

Mechanical Specification



American Wire Gauge SD01		
Input wires	Black cable (L), Red black cable (L1) , White cable (N) and Green cable (FG) (4*18AWG)	
Output wires	Red cable (V+), Blue cable (V-) (2*18AWG)	

Warm tips:

- Any other requests, we can customize.
- Please ensure that the connection is correct.

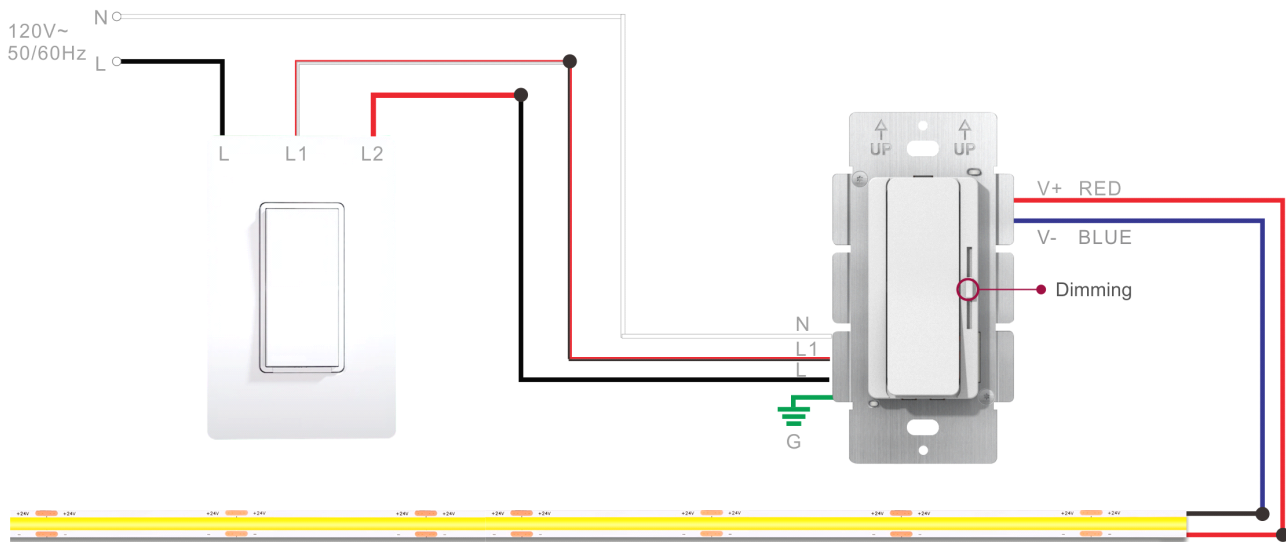
Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

Connecting Diagram

① EDD-DC model for standard dimming system



② EDD-DC model for 3-way dimming system

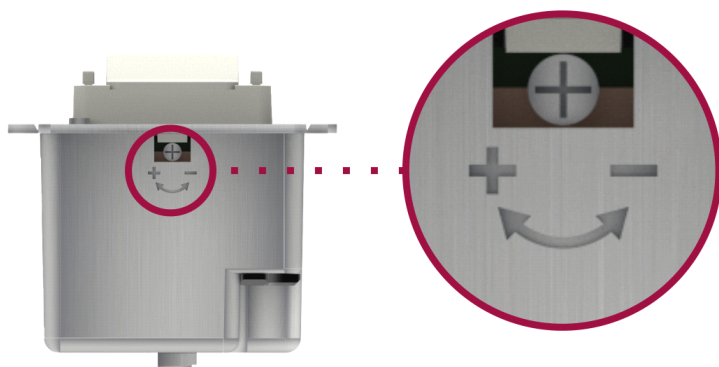


Note: Dimmer's panel is not replaceable.

Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

Knob to adjust the voltage

Clockwise rotation of the high voltage

**Output Volt. Adjustment**

12V output volt. : 12-13.5V

24V output volt. : 24-26V

48V output volt. : 48-50V

Instructions

1. This driver+dimmer 2 in 1 should be installed by qualified and professional person.
2. Please make sure the driver+dimmer 2 in 1 is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver+dimmer 2 in 1 be damaged.
4. If the driver+dimmer 2 in 1 cannot work normally, don't maintain privately.

Have any questions, please contact with EMCOD.

Please visit our website or contact us for more information! www.emcod.com