

HOUSING



Classic Frames

Remodel

4", 6" Aperture

SUMMARY

HOUSING: Die-formed steel with powder coat finish (4" housing), 22 ga. die-formed aluminum (6" housing).

JUNCTION BOX: Galvanized steel. Equipped with (6) 1/2" and (1) 3/4" knockouts with pryout slots to allow straight conduit runs (4" housing), equipped with (5) 1/2" and (2) 3/4" knockouts with pryout slots to allow straight conduit runs (5", 6" housing). (4) knockouts for non-metallic sheathed cable installation. Junction box tension spring allows snap-in installation of plate cover for easy access to wiring. Approved for 8 (four-in, four-out) #12 AWG 90 through wire conductors.

MOUNTING: (4) tempered steel spring clips secure housing to ceiling.

CEILING: 1/2" up to 1"

CUTOUT: 4 3/8" (4" housing), 6 3/8" (6" housing).



LISTINGS: ASTM E283 certified Air Tight, IC (Insulation Contact) rated.

WARRANTY: 1 year limited warranty



Classic Frames

Fixed Downlighting System

4" Housing

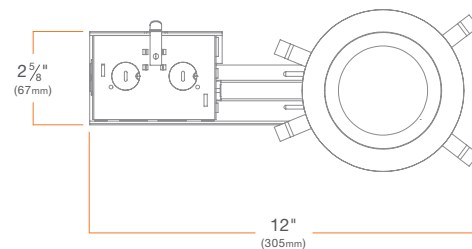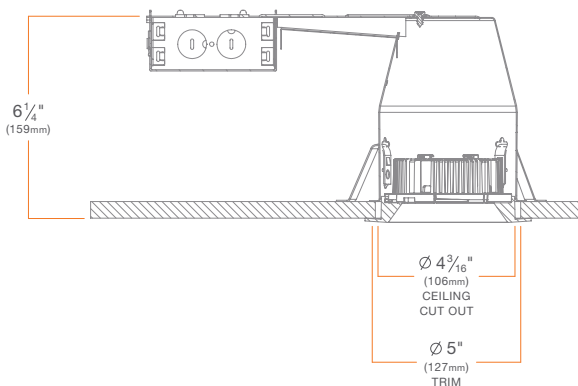

4" Shallow Housing

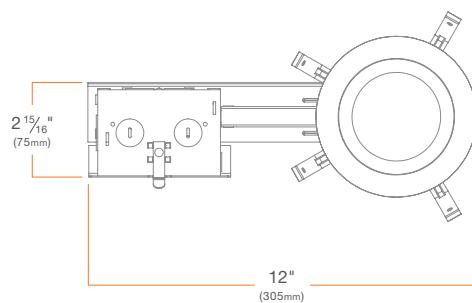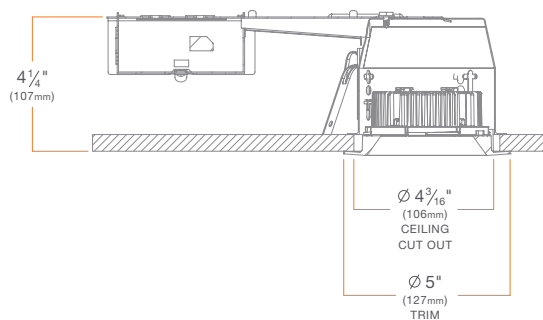

6" Housing

