





RGBW Brass Spotlight, Adjustable Swivel , No Splice Connect (NSC) Wiring (PSDX-K008)

DESCRIPTION

Material: Cast Brass
 Voltage: 12V
 Socket Type: JC Bi-Pin
 Power Rating: 50w Max
 Mounting: Ground / Surface
 Fixture Weight: 2 lbs
 Certifications: UL (E230758)



DIMENSIONS

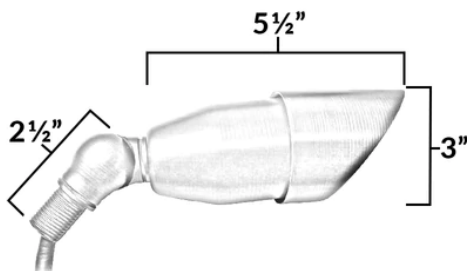

FINISHES



GUN METAL



BRONZE




RAW COPPER

RGBW BULB SPECS

Base Type: GU5.3
 Beam Angle: 60 Degrees
 Bulb Type: MR16. MR16 Smart Bulb
 CCT Value: 2200-5000
 Current Draw: 0.33A (330mA)
 Dimmable: Yes
 Dimming Type: Remote
 IP Rating Non-Weatherproof
 LED Color: RGBCW + Tunable White.
 Selectable CCT
 Intensity: 280 Lumen
 Power Consumption: 5 Watts
 Supported Smart Phone Apps: Megrez
 Type: Bi-Pin Bulb
 Typical Use/Input Voltage: 8-16V AC
 Wattage: 4 Watts



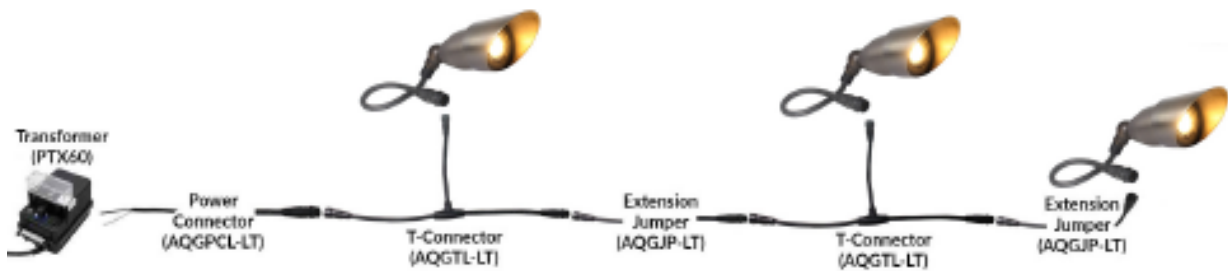

ORDERING INFORMATION

PSDX-K008	VOLTAGE	FINISH	COLOR TEMPERATURE
	12V	BR Bronze	WW Warm White
	120V	GM Gun Metal	CW Cool White
		RC Raw Copper	

PSDX-K008- ____ - ____ - ____

Fixture Type: _____

Job Name: _____

Notes: _____