



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Draped

WS-W60412

**PRODUCT DESCRIPTION**


Dark and light. A solid block of cast glass held by a substantial linear frame radiates clean LED illumination to the surrounding night.

**FEATURES**

- ACLED driverless technology
- Downward illumination
- Solid block of cast glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, ADA
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-5%, TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on wall vertically or upside down
<b>Color Temp</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90
<b>Construction</b>	Extruded aluminum body with cast glass diffuser

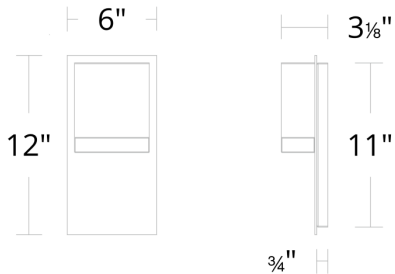


WS-W60412

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W60412 12"	2700K	BK Black	15.9W	1350	550
	3000K	BK Black	15.9W	1350	550
	3500K	BK Black	15.9W	1350	550
	4000K	BK Black	15.9W	1350	550

Example: **WS-W60412-40-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

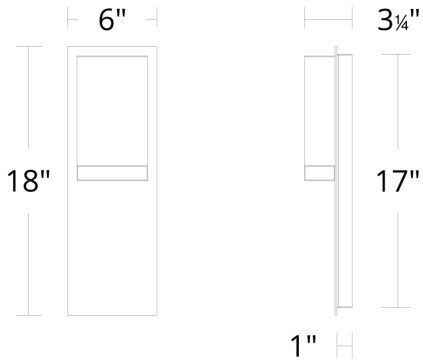

WS-W60418

Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Draped

WS-W60418

**PRODUCT DESCRIPTION**

Dark and light. A solid block of cast glass held by a substantial linear frame radiates clean LED illumination to the surrounding night.

**FEATURES**

- ACLED driverless technology
- Downward illumination
- Solid block of cast glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

**SPECIFICATIONS**

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Mounting	Can be mounted on wall vertically or upside down
Color Temp	2700K, 3000K, 3500K, 4000K
CRI	90
Construction	Extruded aluminum body with cast glass diffuser

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W60418 18"	2700K	BK Black	16.4W	1350	492
	3000K	BK Black	16.4W	1350	492
	3500K	BK Black	16.4W	1350	492
	4000K	BK Black	16.4W	1350	492

Example: **WS-W60418-40-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)